


DUCHESNE COUNTY MONUMENT SURVEY RECORD


T1N R1W  
SEC 32  
SEC 6 | SEC 5  
T1S R1W  
U.S.B.&M.

LINE	BEARING	DISTANCE
L1	N 35°30'49" W	44.68'
L2	S 61°48'02" E	61.00'
L3	S 37°52'54" E	38.75'
L4	S 25°48'11" E	34.16'
L5	N 25°34'19" E	98.51'
L6	S 31°14'14" W	60.92'

Z-5



SCALE: 1"=30'

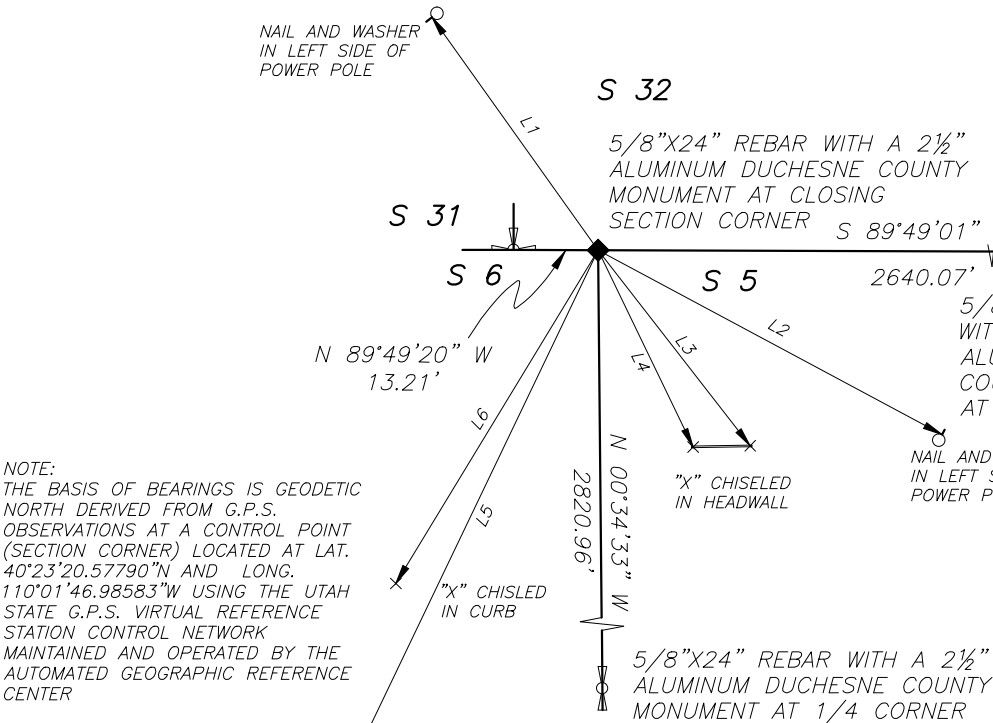

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A SPINDLE AT THE POSITION OF THE SECTION CORNER

NAIL AND WASHER IN LEFT SIDE OF POWER POLE

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A 5/8"x24" REBAR WITH A 2 1/2" ALUMINUM DUCHESNE COUNTY MONUMENT AT THE POSITION OF THE SECTION CORNER AFTER ROAD CONSTRUCTION



STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7329815.889  
E: 2049594.575  
NAVD88 EL: 6021.96'

LATITUDE: 40°25'58.80126" N  
LONGITUDE: 110°01'48.14302" W  
ELLIPSOID HEIGHT: 5968.61'  
(GEOID 03 CONUS)

PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300010S0010W0\_200700

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 FEB 2018

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

